

Extruded Tubing


Enhanced Extrusions To Accelerate Production

Overview-

Zeus is your leader for performance extruded tubing. Our tubing products reach across all industries ranging from aerospace and automotive, electrical, energy exploration, fiber optics, fluid management, to medical, and more. Whether it is lubricity, flexibility, mechanical strength, or chemical resistance, Zeus extrudes tubing that can be a great solution for almost any application environment.

Many of our advanced tubing products are available in standard AWG and fractional sizes from a variety of resins such as PTFE, FEP, PFA, ETFE, PVDF, PEEK, and more. These items have varying wall thicknesses to give a host of options to engineers. We can also produce metric tubing as well as custom tubing upon request.

Extruded tubing has many applications. Fluid management is a key application, especially for tubing produced with resins such as PFA, PTFE, and FEP because of their exceptional chemical resistance; they are also available in a variety of configurations that can be adapted to most standard fittings.

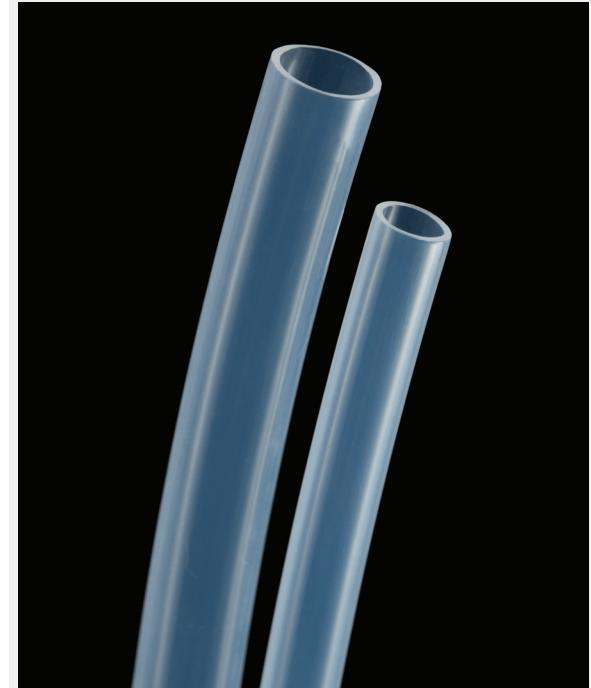

Request free samples of our tubing by contacting a Sales representative today.

APPLICATIONS


- Catheter liners
- Fluid management
- Wire and cable insulation
- Sleeving for fiber optics

CAPABILITIES AND SIZING

- Available resins include: ECTFE, EFEP, ETFE, FEP, Nylons, PE, PEEK, PET, PFA, PTFE, and PVDF
- Resin-dependent AWG / fractional sizes
- Metric sizes
- Colors

KEY PROPERTIES

- Resin-dependant temperatures up to 500 °F / 260 °C
- Chemical resistance
- Flame resistance
(UL 94 rating of V-0 for some resins)
- Lubricity, optically clarity, and flexibility vary, depending on resin



COEFFICIENT OF FRICTION



CHEMICAL RESISTANCE



CONTINUOUS SERVICE TEMP



Extruded Tubing

Supplied in natural color unless otherwise specified. Custom colors available on request.

UL-224 and/or CAN/CSA product available upon request.

AWG SIZE	INSIDE DIAMETER					
	MINIMUM		NOMINAL		MAXIMUM	
	in.	mm	in.	mm	in.	mm
*32	0.008	0.203	0.010	0.254	0.012	0.305
30	0.010	0.254	0.012	0.305	0.015	0.381
28	0.013	0.330	0.015	0.381	0.018	0.457
26	0.016	0.406	0.018	0.457	0.021	0.533
24	0.020	0.508	0.022	0.559	0.026	0.660
*23	0.023	0.584	0.026	0.660	0.029	0.737
22	0.025	0.635	0.028	0.711	0.032	0.813
*21	0.029	0.737	0.032	0.813	0.035	0.889
20	0.032	0.813	0.034	0.864	0.038	0.965
19	0.036	0.914	0.038	0.965	0.042	1.067
18	0.040	1.016	0.042	1.067	0.046	1.168
17	0.045	1.143	0.047	1.194	0.052	1.321
16	0.051	1.295	0.053	1.346	0.058	1.473
15	0.057	1.448	0.059	1.499	0.065	1.651
14	0.064	1.626	0.066	1.676	0.072	1.829
13	0.072	1.829	0.076	1.930	0.081	2.057
12	0.081	2.057	0.085	2.159	0.091	2.311
11	0.091	2.311	0.095	2.413	0.101	2.565
10	0.102	2.591	0.106	2.692	0.112	2.845
9	0.114	2.896	0.118	2.997	0.124	3.150
8	0.129	3.277	0.133	3.378	0.139	3.531
7	0.144	3.658	0.148	3.759	0.155	3.937
6	0.162	4.115	0.166	4.216	0.174	4.420
5	0.182	4.623	0.186	4.724	0.195	4.953
4	0.204	5.182	0.208	5.283	0.218	5.537
3	0.229	5.817	0.234	5.944	0.244	6.198
2	0.258	6.553	0.263	6.680	0.273	6.934
1	0.289	7.341	0.294	7.468	0.305	7.747
0	0.325	8.255	0.330	8.382	0.342	8.687



Extruded Tubing

Supplied in a variety of ODs and IDs. Other custom sizes and combinations quoted on request.

AWG SIZE	WALL DIMENSIONS											
	STANDARD WALL				THIN WALL				LIGHTWEIGHT WALL			
	NOMINAL		TOLERANCE		NOMINAL		TOLERANCE		NOMINAL		TOLERANCE	
	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm
*32	0.005	0.127	± 0.002	± 0.05	0.005	0.127	± 0.002	$\pm .05$	-	-	-	-
30	0.009	0.229	± 0.002	± 0.05	0.009	0.229	± 0.002	± 0.05	0.006	0.152	± 0.002	± 0.05
28	0.009	0.229	± 0.002	± 0.05	0.009	0.229	± 0.002	± 0.05	0.006	0.152	± 0.002	± 0.05
26	0.009	0.229	± 0.002	± 0.05	0.009	0.229	± 0.002	± 0.05	0.006	0.152	± 0.002	± 0.05
24	0.012	0.305	± 0.002	± 0.05	0.010	0.254	± 0.003	± 0.08	0.006	0.152	± 0.002	± 0.05
*23	0.012	0.305	± 0.002	± 0.05	0.010	0.254	± 0.003	± 0.08	0.006	0.152	± 0.002	± 0.05
22	0.012	0.305	± 0.002	± 0.05	0.010	0.254	± 0.003	± 0.08	0.006	0.152	± 0.002	± 0.05
*21	0.012	0.305	± 0.002	± 0.05	0.010	0.254	± 0.003	± 0.08	0.006	0.152	± 0.002	± 0.05
20	0.016	0.406	± 0.003	± 0.08	0.012	0.305	± 0.003	± 0.08	0.006	0.152	± 0.002	± 0.05
19	0.016	0.406	± 0.003	± 0.08	0.012	0.305	± 0.003	± 0.08	0.006	0.152	± 0.002	± 0.05
18	0.016	0.406	± 0.003	± 0.08	0.012	0.305	± 0.003	± 0.08	0.006	0.152	± 0.002	± 0.05
17	0.016	0.406	± 0.003	± 0.08	0.012	0.305	± 0.003	± 0.08	0.006	0.152	± 0.002	± 0.05
16	0.016	0.406	± 0.003	± 0.08	0.012	0.305	± 0.003	± 0.08	0.006	0.152	± 0.002	± 0.05
15	0.016	0.406	± 0.003	± 0.08	0.012	0.305	± 0.003	± 0.08	0.006	0.152	± 0.002	± 0.05
14	0.016	0.406	± 0.003	± 0.08	0.012	0.305	± 0.003	± 0.08	0.008	0.203	± 0.002	± 0.05
13	0.016	0.406	± 0.003	± 0.08	0.012	0.305	± 0.003	± 0.08	0.008	0.203	± 0.002	± 0.05
12	0.016	0.406	± 0.003	± 0.08	0.012	0.305	± 0.003	± 0.08	0.008	0.203	± 0.002	± 0.05
11	0.016	0.406	± 0.003	± 0.08	0.012	0.305	± 0.003	± 0.08	0.008	0.203	± 0.002	± 0.05
10	0.016	0.406	± 0.003	± 0.08	0.012	0.305	± 0.003	± 0.08	0.008	0.203	± 0.002	± 0.05
9	0.020	0.508	± 0.004	± 0.10	0.015	0.381	± 0.003	± 0.08	0.008	0.203	± 0.002	± 0.05
8	0.020	0.508	± 0.004	± 0.10	0.015	0.381	± 0.003	± 0.08	0.008	0.203	± 0.002	± 0.05
7	0.020	0.508	± 0.004	± 0.10	0.015	0.381	± 0.003	± 0.08	0.008	0.203	± 0.002	± 0.05
6	0.020	0.508	± 0.004	± 0.10	0.015	0.381	± 0.003	± 0.08	0.010	0.254	± 0.003	± 0.08
5	0.020	0.508	± 0.004	± 0.10	0.015	0.381	± 0.003	± 0.08	0.010	0.254	± 0.003	± 0.08
4	0.020	0.508	± 0.004	± 0.10	0.015	0.381	± 0.003	± 0.08	0.010	0.254	± 0.003	± 0.08
3	0.020	0.508	± 0.004	± 0.10	0.015	0.381	± 0.003	± 0.08	0.010	0.254	± 0.003	± 0.08
2	0.020	0.508	± 0.004	± 0.10	0.015	0.381	± 0.003	± 0.08	0.010	0.254	± 0.003	± 0.08
1	0.020	0.508	± 0.004	± 0.10	0.015	0.381	± 0.003	± 0.08	0.010	0.254	± 0.003	± 0.08
0	0.020	0.508	± 0.004	± 0.10	0.015	0.381	± 0.003	± 0.08	0.012	0.305	± 0.003	± 0.08



Extruded Tubing

UL-224 and/or CAN/CSA product available upon request.

On all cases of military or commercial specifications, latest revisions apply. Supplied in natural color unless otherwise specified. Custom colors available on request.

Testing available upon request.

FRACTIONAL SIZES BY ID	INSIDE DIAMETER					
	MINIMUM		NOMINAL		MAXIMUM	
	in.	mm	in.	mm	in.	mm
1/8	0.120	3.048	0.125	3.175	0.130	3.302
1/8	0.125	3.175	0.130	3.302	0.135	3.429
3/16	0.188	4.775	0.192	4.877	0.198	5.029
1/4	0.250	6.350	0.255	6.477	0.260	6.604
5/16	0.313	7.950	0.321	8.153	0.332	8.433
3/8	0.375	9.525	0.387	9.830	0.394	10.008
7/16	0.438	11.125	0.451	11.455	0.458	11.633
1/2	0.500	12.700	0.515	13.081	0.520	13.208
5/8	0.625	15.875	0.643	16.332	0.650	16.510
3/4	0.750	19.050	0.772	19.609	0.775	19.685
7/8	0.875	22.225	0.902	22.911	0.927	23.546
1	1.000	25.400	1.030	26.162	1.060	26.924
1-1/4	1.250	31.750	1.287	32.690	1.325	33.655
1-1/2	1.500	38.100	1.550	39.370	1.580	40.132



Extruded Tubing

UL-224 and/or CAN/CSA product available upon request.

On all cases of military or commercial specifications, latest revisions apply. Supplied in natural color unless otherwise specified. Custom colors available on request.

Testing available upon request.

WALL DIMENSIONS														
FRACTIONAL SIZES BY ID	STANDARD WALL				THIN WALL				LIGHTWEIGHT WALL					
	Nominal		Tolerance		Nominal		Tolerance		Nominal		Tolerance			
	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm
1/8	0.020	0.51	± 0.004	± 0.10	0.015	0.38	± 0.03	± 0.08	-	-	-	-	-	-
1/8	-	-	-	-	-	-	-	-	0.008	0.20	± 0.02	± 0.05	-	-
3/16	0.020	0.51	± 0.004	± 0.10	0.015	0.38	± 0.03	± 0.08	0.010	0.25	± 0.03	± 0.08	-	-
1/4	0.020	0.51	± 0.004	± 0.10	0.015	0.38	± 0.03	± 0.08	0.010	0.25	± 0.03	± 0.08	-	-
5/16	0.020	0.51	± 0.004	± 0.10	0.015	0.38	± 0.03	± 0.08	0.012	0.30	± 0.03	± 0.08	-	-
3/8	0.025	0.64	± 0.005	± 0.13	0.015	0.38	± 0.03	± 0.08	0.015	0.38	± 0.05	± 0.13	-	-
7/16	0.025	0.64	± 0.005	± 0.13	0.018	0.46	± 0.04	± 0.10	0.018	0.46	± 0.05	± 0.13	-	-
1/2	0.025	0.64	± 0.005	± 0.13	0.018	0.46	± 0.04	± 0.10	0.018	0.46	± 0.05	± 0.13	-	-
5/8	0.025	0.64	± 0.005	± 0.13	0.020	0.51	± 0.04	± 0.10	0.020	0.51	± 0.05	± 0.13	-	-
3/4	0.030	0.76	± 0.006	± 0.15	0.025	0.64	± 0.05	± 0.13	0.020	0.51	± 0.05	± 0.13	-	-
7/8	0.035	0.89	± 0.007	± 0.18	-	-	-	-	-	-	-	-	-	-
1	0.035	0.89	± 0.007	± 0.18	-	-	-	-	-	-	-	-	-	-
1-1/4	0.040	1.02	± 0.007	± 0.18	-	-	-	-	-	-	-	-	-	-
1-1/2	0.045	1.14	± 0.007	± 0.18	-	-	-	-	-	-	-	-	-	-



Extruded Tubing

UL-224 and/or CAN/CSA product available upon request.

On all cases of military or commercial specifications, latest revisions apply. Supplied in natural color unless otherwise specified. Custom colors available on request.

Testing available upon request.

INDUSTRIAL SPECIFICATION TUBING						
FRACTIONAL SIZES	ID		OD		NOMINAL WALL	
	in.	mm	in.	mm	in.	mm
1/32	0.031 ± 0.004	0.79 ± 0.10	0.063 ± 0.004	1.60 ± 0.10	0.15	0.38
1/16	0.063 ± 0.005	1.60 ± 0.13	0.125 ± 0.005	3.18 ± 0.13	0.30	0.76
3/32	0.094 ± 0.005	2.39 ± 0.13	0.156 ± 0.005	3.96 ± 0.13	0.30	0.76
1/8	0.125 ± 0.005	3.18 ± 0.13	0.188 ± 0.005	4.78 ± 0.13	0.30	0.76
3/16	0.188 ± 0.005	4.78 ± 0.13	0.250 ± 0.005	6.35 ± 0.13	0.30	0.76
1/4	0.250 ± 0.005	6.35 ± 0.13	0.313 ± 0.005	7.95 ± 0.13	0.30	0.76
5/16	0.313 ± 0.005	7.95 ± 0.13	0.375 ± 0.005	9.53 ± 0.13	0.30	0.76
3/8	0.375 ± 0.005	9.53 ± 0.13	0.438 ± 0.005	11.13 ± 0.13	0.30	0.76
7/16	0.438 ± 0.005	11.13 ± 0.13	0.500 ± 0.006	12.70 ± 0.15	0.30	0.76
1/2	0.500 ± 0.006	12.70 ± 0.15	0.563 ± 0.006	14.30 ± 0.15	0.30	0.76
9/16	0.563 ± 0.006	14.30 ± 0.15	0.625 ± 0.006	15.88 ± 0.15	0.30	0.76
5/8	0.625 ± 0.006	15.88 ± 0.15	0.688 ± 0.006	17.48 ± 0.15	0.30	0.76
11/16	0.688 ± 0.006	17.48 ± 0.15	0.750 ± 0.006	19.05 ± 0.15	0.32	0.81
3/4	0.750 ± 0.006	19.05 ± 0.15	0.830 ± 0.006	21.08 ± 0.15	0.40	1.02
7/8	0.875 ± 0.006	22.23 ± 0.15	0.965 ± 0.006	24.51 ± 0.15	0.45	1.14
1	1.000 ± 0.010	25.40 ± 0.25	1.10 ± 0.010	27.94 ± 0.25	0.50	1.27
1-1/8	1.125 ± 0.015	28.58 ± 0.38	1.215 ± 0.015	30.86 ± 0.38	0.45	1.14
1-1/4	1.250 ± 0.015	31.75 ± 0.38	1.340 ± 0.015	34.04 ± 0.38	0.45	1.14
1-1/2	1.500 ± 0.015	38.10 ± 0.38	1.580 ± 0.015	40.13 ± 0.38	0.40	1.02



Extruded Tubing

Supplied in natural color unless otherwise specified. Custom colors available on request.

0.50 mm WALL TUBING			
ORDERING SIZE (ID/OD)		ID	TOLERANCE
ID	OD		±
0.50	1.50	0.50	0.05
1.00	2.00	1.00	0.05
1.50	2.50	1.50	0.10
2.00	3.00	2.00	0.10
2.50	3.50	2.50	.015
3.00	4.00	3.00	0.15
3.50	4.50	3.50	0.15
4.00	5.00	4.00	0.15
4.50	5.50	4.50	0.20
5.00	6.00	5.00	0.20
5.50	6.50	5.50	0.20
6.00	7.00	6.00	0.20
6.50	7.50	6.50	0.20
7.00	8.00	7.00	0.20
7.50	8.50	7.50	0.20
8.00	9.00	8.00	0.20
8.50	9.50	8.50	0.30
9.00	10.00	9.00	0.30
12.00	13.00	12.00	0.30
13.00	14.00	13.00	0.50

Wall thickness for ID sizes 0.50 - 13.00" = $0.50 \pm 0.07"$.

1.00 mm WALL TUBING			
ORDERING SIZE (ID/OD)		ID	TOLERANCE
ID	OD		±
1.00	3.00	1.00	0.05
2.00	4.00	2.00	0.10
2.50	4.50	2.50	0.15
3.00	5.00	3.00	0.15
3.50	5.50	3.50	0.15
4.00	6.00	4.00	0.15
4.50	6.50	4.50	0.20
5.00	7.00	5.00	0.20
5.50	7.50	5.50	0.20
6.00	8.00	6.00	0.20
6.50	8.50	6.50	0.20
7.00	9.00	7.00	0.20
7.50	9.50	7.50	0.20
8.00	10.00	8.00	0.20
8.50	10.50	8.50	0.30
9.00	11.00	9.00	0.30
9.50	11.50	9.50	0.30
10.00	12.00	10.00	0.30
10.50	12.50	10.50	0.30
11.00	13.00	11.00	0.30
12.00	14.00	12.00	0.30
13.00	15.00	13.00	0.30
14.00	16.00	14.00	0.30
15.00	17.00	15.00	0.40
16.00	18.00	16.00	0.40
18.00	20.00	18.00	0.40
19.00	21.00	19.00	0.40
19.50	21.5	19.50	0.40
20.00	22.00	20.00	0.40
21.00	23.00	21.00	0.50
22.00	24.00	22.00	0.50
22.50	24.50	22.50	0.50
23.00	25.00	23.00	0.50
23.50	25.50	23.50	0.50

Wall thickness for ID sizes 1.00 - 23.50" = $1 \pm 0.15"$



Extruded Tubing

Supplied in natural color unless otherwise specified. Custom colors available on request.

1.00 mm WALL TUBING				1.50 mm WALL TUBING						
ORDERING SIZE (ID/OD)		ID	TOLERANCE	WALL THICKNESS	ORDERING SIZE (ID/OD)		ID	TOLERANCE	WALL THICKNESS	
ID	OD	±			ID	OD	±			
25.0	27.0	25.0	0.50	1.00 ± 0.15	1.5	4.5	1.5	0.10	1.50 ± 0.20	
26.0	28.0	26.0	0.50	1.00 ± 0.15	2.0	5.0	2.0	0.15	1.50 ± 0.20	
27.0	29.0	27.0	0.50	1.00 ± 0.15	3.0	6.0	3.0	0.15	1.50 ± 0.20	
28.0	30.0	28.0	0.50	1.00 ± 0.15	5.0	9.0	5.0	0.20	1.50 ± 0.20	
29.0	31.0	29.0	0.50	1.00 ± 0.15	6.0	13.0	6.0	0.20	1.50 ± 0.20	
30.0	32.0	30.0	0.60	1.00 ± 0.15	10.0	15.0	10.0	0.30	1.50 ± 0.20	
32.0	34.0	32.0	0.60	1.00 ± 0.15	12.0	16.0	12.0	0.30	1.50 ± 0.20	
37.0	39.0	37.0	0.60	1.00 ± 0.15	13.0	17.0	13.0	0.30	1.50 ± 0.20	
38.0	40.0	38.0	0.60	1.00 ± 0.15	14.0	19.0	14.0	0.30	1.50 ± 0.20	
40.0	42.0	40.0	0.75	1.00 ± 0.15	16.0	21.0	16.0	0.40	1.50 ± 0.20	
42.0	44.0	42.0	0.75	1.00 ± 0.15	18.0	22.0	18.0	0.40	1.50 ± 0.20	
43.0	45.0	43.0	0.75	1.00 ± 0.15	19.0	23.0	19.0	0.40	1.50 ± 0.20	
45.0	47.0	45.0	0.75	1.00 ± 0.15	20.0	24.0	20.0	0.50	1.50 ± 0.20	
45.5	47.5	45.5	0.75	1.00 ± 0.15	21.0	25.0	21.0	0.50	1.50 ± 0.20	
48.0	50.0	48.0	0.75	1.00 ± 0.15	22.0	25.0	22.0	0.50	1.50 ± 0.20	
50.0	52.0	50.0	0.75	1.00 ± 0.15	25.0	28.0	25.0	0.50	1.50 ± 0.20	
					28.0	31.0	28.0	0.50	1.50 ± 0.20	
					29.0	32.0	29.0	0.50	1.50 ± 0.20	
2.00 mm WALL TUBING					30.0	33.0	30.0	0.60	1.50 ± 0.20	
ORDERING SIZE (ID/OD)		ID	TOLERANCE	WALL THICKNESS		40.0	43.0	40.0	0.75	1.50 ± 0.20
ID	OD	±			49.0	52.0	49.0	0.75	1.50 ± 0.20	
2.00	6.00	2.00	0.10	2.00 ± 0.20						
4.00	8.00	4.00	0.15	2.00 ± 0.20						
6.00	10.00	6.00	0.20	2.00 ± 0.20						
8.00	12.00	8.00	0.20	2.00 ± 0.20						
10.00	14.00	10.00	0.30	2.00 ± 0.20						
12.00	16.00	12.00	0.30	2.00 ± 0.20						
14.00	18.00	14.00	0.40	2.00 ± 0.20						
16.00	20.00	16.00	0.40	2.00 ± 0.20						
20.00	24.00	20.00	0.50	2.00 ± 0.20						
25.00	29.00	25.00	0.50	2.00 ± 0.20						
28.00	32.00	28.00	0.50	2.00 ± 0.20						
28.50	32.50	28.50	0.50	2.00 ± 0.20						
32.00	36.00	32.00	0.60	2.00 ± 0.20						
36.00	40.00	36.00	0.60	2.00 ± 0.20						
40.00	44.00	40.00	0.75	2.00 ± 0.20						
46.00	50.00	46.00	0.75	2.00 ± 0.20						

